

# FIBRANgeo BP-ETICS

## Stonewool insulation board with knit fibres

Technical Data Sheet / April 2022



### Description

**FIBRANgeo BP-ETICS** (1000 x 600 mm) rigid stonewool board is a natural inorganic fibrous product that is industrially produced from molten rock spun into fibres, in accordance with European Standard EN 13162 (Thermal insulation products for buildings - Factory made mineral wool (MW) products).


### Applications



Boards designed for thermal insulation, fire resistance and sound insulation applications on External Thermal Insulations Composite Systems (E.T.I.C.S.):

- External walls
- External pilotis

Complementary to the E.T.I.C.S. application, **FIBRANgeo CAPs** (rigid stonewool insulation discs) are installed over the mechanical anchors' heads, where **FIBRANgeo BP-ETICS** or **FIBRANgeo BP-ETICSplus** stonewool is used as part of a composite external thermal insulation system (ETICS), in order to eliminate thermal bridges and optimize application of final render.

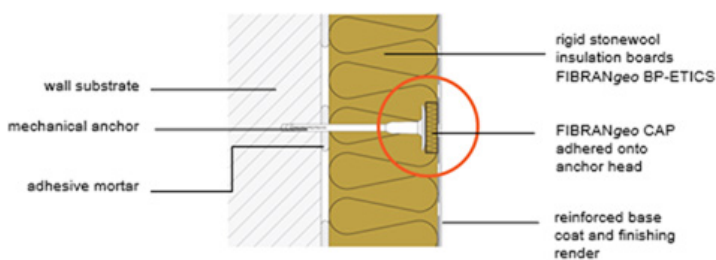

### Advantages

- Excellent thermal insulation
- Non-combustible material with excellent fire resistance
- Excellent sound absorption and sound reduction
- Open hive structure material with very low water vapour diffusion resistance that enhances the building element's breathability
- Excellent dimensional stability and durability
- Water repellent and non-hygroscopic
- Easy to handle, cut and install
- Natural, inorganic, odourless, chemically inert (practically neutral PH)
- Recyclable, friendly to the environment and to the end user

# FIBRAN<sub>geo</sub> BP-ETICS

## Stonewool insulation board with knit fibres

Technical Data Sheet / April 2022

### Technical characteristics

Designation Code:

**MW (Mineral Wool) - EN 13162 – T5 – DS(70,90) – CS(10)30 – TR10 – PL(5)300 – WS – WL(P) – MU1 – AW0,95 – AFR50**


Technical Characteristics	Symbol EN 13162	Unit	Value	EN Standard
Declared thermal conductivity at 10°C	$\lambda_D$	W/(mK)	0,035	EN 13162 EN 12667 EN 12939
Nominal thickness	$d_N$	mm	30 – 300	EN 823
Fire classification	-	Class	A1 (Non-combustible)	EN 13501-1
Melting temperature	-	°C	>1000	DIN 4102-17
Specific heat capacity	c	kJ/kgK	1,03	ISO 10456
Thickness tolerance	T	Class	T5 (<100mm: -1 , +3 mm) (≥ 100mm: +1% , +3 mm)	EN 12431
Dimensional stability	DS(70,90)	%	<1	EN 1604
Compressive Stressa at 10% thickness deformation	CS(10)	kPa	≥ 30	EN 826
Tensile strength perpendicular to faces	TR	kPa	≥ 10	EN 1607
Point Load at 5mm thickness deformation	PL(5)	N	≥ 300	EN 12430
Short term water absorption for 24 hours	WS	kg/m <sup>2</sup>	<1	EN 1609
Long term water absorption for 28 days	WL(P)	kg/m <sup>2</sup>	<3	EN 12087
Water vapor diffusion resistance factor, $\mu$	MU	-	1	EN 12086
Air flow resistivity, r	AFr	kPa s/m <sup>2</sup>	≥ 50	EN 29053
Weighted sound absorption coefficient on boards with thickness 50mm, $\alpha_w$	AW NRC	-	0,95 Class A 0,90	EN ISO 11654 EN ISO 354

### Thermal resistance R

<b>Nominal thickness</b>	$d_N$	mm	30	40	50	60	70	80	90	100	110	120	EN 823
<b>Declared thermal resistance</b>	$R_D$	m <sup>2</sup> K/W	0,85	1,10	1,40	1,70	2,00	2,25	2,55	2,85	3,10	3,40	EN 13162
<b>Nominal thickness</b>	$d_N$	mm	140	150	160	180	200	220	240	260	280	300	EN 823
<b>Declared thermal resistance</b>	$R_D$	m <sup>2</sup> K/W	4,00	4,25	4,55	5,10	5,70	6,25	6,85	7,40	8,00	8,55	EN 13162

### Acoustic properties

Sound absorption coefficient  $\alpha$  (EN ISO 354) on boards with thickness 50mm

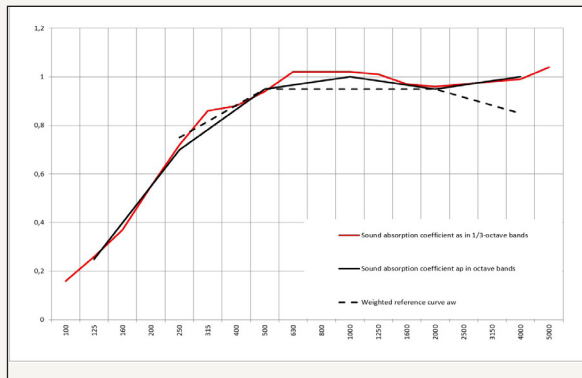

Frequency (Hz)	$\alpha_s$	$\alpha_p$	$\alpha_w$
125	0,26	0,25	-
250	0,72	0,70	0,75
500	0,94	0,95	0,95
1000	1,02	1,00	0,95
2000	0,96	0,95	0,95
4000	0,99	1,00	0,85

Weighted sound absorption coefficient

$\alpha_w = 0,95$  - Class A (EN ISO 11654)

Noise reduction coefficient

**NRC = 0,90** (ASTM 423)

### Certification

**FIBRAN<sub>geo</sub> BP-ETICS** stonewool insulation products have been certified according to European Norms EN 13162 και EN 13172 and hold the CE marking that derives from the Declaration of Performance **DoP**.

All **FIBRAN<sub>geo</sub>** stonewool insulation products meet the quality and safety requirements of the European Standards and complies with the European Regulations 305/2011 (CPR).

Furthermore, all **FIBRAN<sub>geo</sub>** stonewool products, carry the certification mark EUCEB (European Certification Board for Mineral Wool Products), whose procedures ensure compliance of mineral wool insulation products with the "Note Q" of Directive 97/69/EC, regarding their fibres biosolubility and their non-classification as dangerous materials.

Moreover, according to EC Regulation 790/2009 they are not classified as products that cause skin irritation (R38).

FIBRAN S.A. implements a system of quality management according to ISO 9001:2015 and environmental management according to ISO 14001:2015.

### Application

**FIBRAN<sub>geo</sub>** products must be protected from getting wet before and on their application. If part of the product gets wet, it must be dried before installation. Stonewool dries quickly and its insulating properties remain unchanged after drying. Packaging should be removed carefully just before the installation.

Working areas should be kept clean. Unnecessary or extensive contact of the skin and eyes with products off-cuts, fibres and dust should be avoided, and protective wear should be used (gloves, goggles, hats).

Products with facing AL, AX, YM ή YA are not suggested for application with service temperature on the surface more than 90°C while those with surface XA are not suggested for more than 66°C.

Sufficient ventilation of the working areas should be ensured, whilst power cutting tools should always be equipped or supplemented with a mechanical system of dust intake.

Stonewool products are not dangerous materials for disposal. They are covered by code 17.06.04 of the waste list, of Decision 2000/532 / EC and are disposed of in accordance with applicable environmental regulations.

More informations on the **Safety Data Sheet** of product.



# FIBRAN<sup>geo</sup> BP-ETICS

## Stonewool insulation board with knit fibres

Technical Data Sheet / April 2022

### Storage

FIBRAN<sup>geo</sup> products should be stored indoors. If stored outdoors, they must be protected from impregnation. Handling, loading and unloading of the products should be carried out with care to avoid damage to both the packaging and the board's edges.

### Packaging

Thickness [mm]	Width [mm]	Length [mm]	Boards per package [pc.]	Quantity per package [m <sup>2</sup> ]	Packages per pallet [pc.]	Quantity per pallet [m <sup>2</sup> ]
30	600	1000	8	4,80	20	96,00
40	600	1000	7	4,20	18	75,60
50	600	1000	6	3,60	16	57,60
60	600	1000	5	3,00	16	48,00
70	600	1000	4	2,40	18	43,20
80	600	1000	5	3,00	12	36,00
100	600	1000	3	1,80	16	28,80
120	600	1000	4	2,40	10	24,00
140	600	1000	2	1,20	18	21,60
150	600	1000	3	1,80	10	18,00
160	600	1000	3	1,80	10	18,00
180	600	1000	2	1,20	14	16,80
200	600	1000	2	1,20	12	14,40
220	600	1000	1	0,60	22	13,20
240	600	1000	1	0,60	20	12,00
260	600	1000	1	0,60	18	10,80
280	600	1000	1	0,60	18	10,80
300	600	1000	1	0,60	16	9,60



#### FIBRAN S.A

6<sup>th</sup> km Thessaloniki - Oreokastro Rd.  
 P.O. Box 40306, A.C. 564 10  
 Thessaloniki, Greece  
 Tel. +30 2310 682 425. 692 700  
 Fax. +30 2310 683 131

info@fibran.gr  
 www.fibran.gr